Curb Ramp Compliance Checklist

Reference: Standard Drawing 2319 (03/30/2018)-Curb Ramps

Project Name: Inspection Da		Date :	
Intersection of : and			
Ramp No:			
1)	Is a 4' wide pedestrian access route (PAR) maintained?	□ YES	□NO
2)	Is there a minimum 4' x 4' landing adjacent to each ramp (P landing 4'x5')	□ YES	□ NO
3)	Landing slopes: max 2.08% (1/4"/ft.)	A)%	B)%
4)	Street counter slope at the base of the ramp: max 5.00%		%
5)	Ramp's running slope: max 8.33% (1:12)		%
6)	Ramp's cross slope: max 2.08% (1/4"/ft)		%
7)	Is there a detectable warning present?	□ YES	□NO
8)	Is the maximum distance of concrete between the DW and edge concrete or flares less than 6"? (if greater, comment distance)	of YES	□NO
9)	Is the detectable warning mat placed less than 8" behind the face of curb and curb joint?	yES □ YES	□ NO
10)	Are 95% of the truncated domes in the detectable warning mat intact?	□ YES	□NO
11)	Is the detectable warning mat properly oriented? (perpendicular the running slope)	to	□ NO
12)	Is gutter line at the curb ramps draining properly and not holding water? (Look for evidence of sediment and make comments about the cause and suggested ponding repair)		□ NO
13)	Are there any vertical discontinuities greater than 1/4"? (lips / offsets)	\square YES	□NO
14)	Are short flares only used adjacent to non-walkable areas?	□ YES	□NO
15)	Are ramps fully compliant?	☐ YES	□ NO
16)	Photos Attached?	☐ YES	□NO
Please comment on any failures on second sheet. Inspector Name: Inspector Signature:			
mapocior argument.			

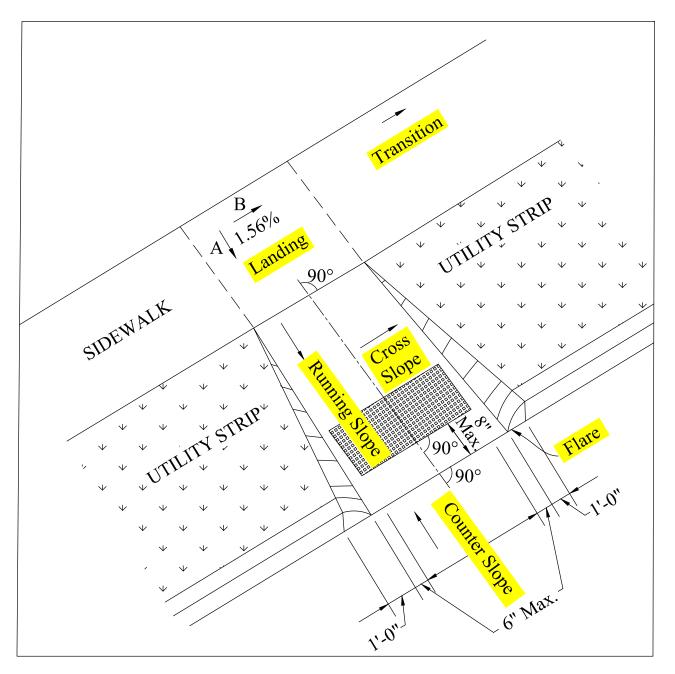


Figure 1 - Typical Ramp Terminology