


- NOTES**
- 1) OUTLET AND/OR OVERFLOW CONTROLS ARE GENERALLY ONLY NEEDED AT SAGS OR IN FACILITIES THAT REQUIRE A MINIMUM DRAW DOWN TIME. IF CONTROL IS NOT NECESSARY, A CLEAN OUT SHALL BE INSTALLED.

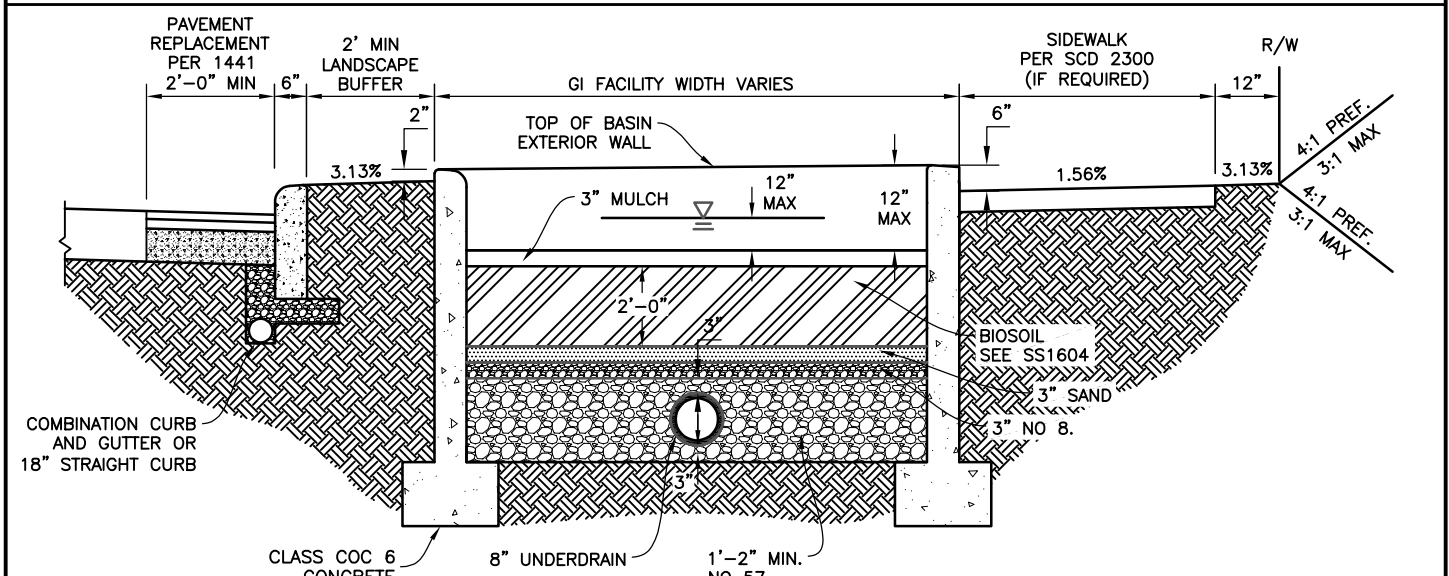

- NOTES:**
1. THIS BASIN TYPE SHALL ONLY BE USED WHEN NECESSARY.
  2. IF EXISTING WALKS ARE PRESENT THE NEW WALK SHALL BE IMMEDIATELY ADJACENT TO THE REAR WALL.
  3. THE INTERIOR WALL FACES SHALL BE STAMPED CONCRETE.
  4. PRECAST WALLS/BOXES SHALL BE IN ACCORDANCE WITH ASTM-C913 UNLESS DETAILED DESIGNS ARE PROVIDED WITHIN THE CONSTRUCTION DOCUMENTS.
  3. IF A BASIN DOES NOT REQUIRE AN OVERFLOW OR OUTLET CONTROL DEVICE, A SINGLE, CENTERED INLET IS ALLOWABLE
  4. DRAINAGE NOTCHES/HOLES TO BE INSTALLED AT BASIN CORNERS AND ON 20' SPACING WHEN BASIN IS ADJACENT TO SIDEWALK

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC UTILITIES DIVISION OF SEWERAGE & DRAINAGE	BIORETENTION BASIN WITH FOUR WALLS NOT ADJACENT TO CURB	STANDARD DRAWING <b>AA-S188</b> REVISED 5/26/22
APPROVED: <i>[Signature]</i> SSES MANAGER	<b>8/26/22</b> DATE	PAGE 1 / 1